


Module system for GasIQ's outlet points



SECTION A-A

1. Start with a wall bracket

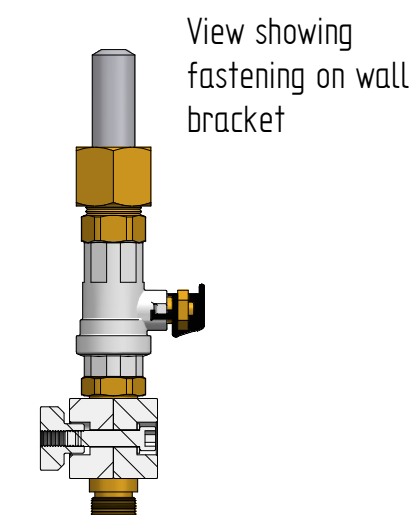


Wall bracket
Art. nr. 3112-0050


4. Choose angle connection for single regulator or t-connection for more than one

The 2 plugs on the t-connection can be switched for 3/8" connections

Nipple
Art.nr. 3208-0012




Plug

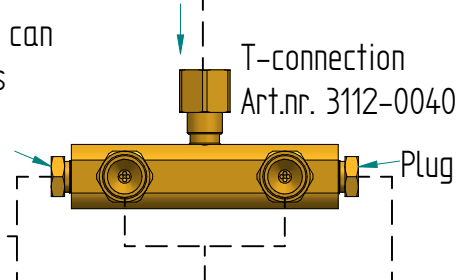


T-connection
Art.nr. 3112-0040

Plug




Angle connection
Art.nr. 3163-0107

5. Choose regulator or flowmeter

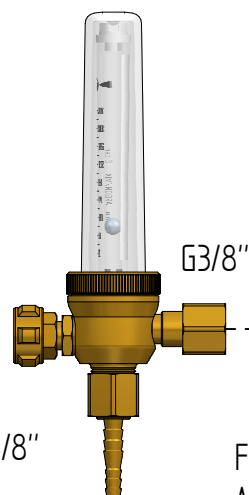

G3/8"

Flow meter, 30L/min
Art.nr. 3712-0530
OBS! Max 10 bar inlet pressure

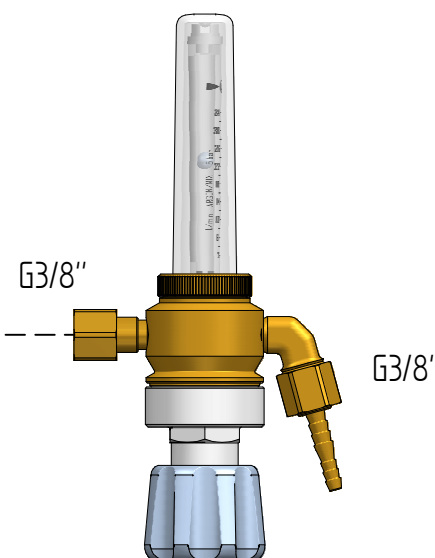

Elga Optimator®. 30L/min
Art.nr. 3712-3260
other options on request


Gas: AR/OX

2. Choose gas

Gas: AC/PROP.

A

Nipple for welding/soldering 16mm

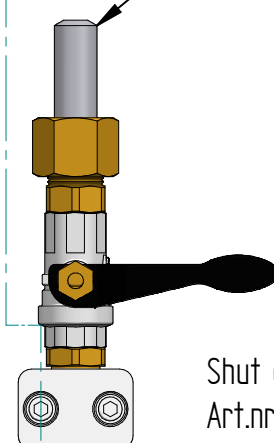

Shut off valve AR/OX
Art.nr. 3112-0000

G3/8"

3a. For Argon


3b. For Oxygen



Regulator OX
Art.nr. 3720-0000
or
Regulator AR/MIX
Art.nr. 3722-0000

Flashback arrestor OX
Art.nr. 3004-1000

G3/8"

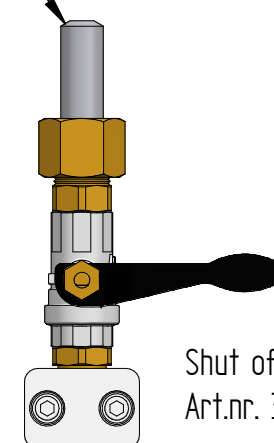

Shut off valve AC/PROP.
Art.nr. 3121-0000

G3/8"L



Regulator AC
Art.nr. 3721-0000
or
Regulator Propan
Art.nr. 3704-0000

Flashback arrestor AC
Art.nr. 3004-0000

G3/8"L

GasIQ
Intelligent solutions for industry